

Type: \_\_\_\_\_  
 Model: \_\_\_\_\_  
 Project: \_\_\_\_\_

## SPECIFICATION SHEET

# MULTI-TAP SERIES – *Stainless Steel Multi-Tap Transformer*

### SPECIFICATIONS:

**EXTERIOR CONSTRUCTION:**

20-gauge polished, top-grade domestic, 304 stainless steel.

**FINISH:**

Polished stainless steel with Smudge-Free clear powder-coat.

**TRANSFORMER CHARACTERISTICS:**

Available Power Ratings: 300, 600, 900, and 1200 Watts

Primary Voltage: 120 Volts (Also available in 240V, 50 or 60 cycle-Special order only.)

Secondary Voltage: 11, 12, 13, 14, and 15 Volts

Fully grounded and isolated with encapsulated core and coil.

**TERMINALS:**

Extra-large terminal strip for multiple low voltage cable connections. A separate 120-volt terminal strip for easy hard-wiring and accessory terminal strip for easy installation of external switching devices also included.

**PRIMARY PROTECTION:**

Auto thermal shut-off.

**SECONDARY PROTECTION:**

Resettable high performance magnetic circuit breaker.

**WIRING:**

6-foot, heavy-gauge, grounded, water-resistant power cord with integrally molded plug.


**CERTIFICATION:**

UL Listed to U.S. and Canadian safety standards for landscape lighting transformers (UL 1838). Pool & Spa Ready - Suitable for use with Submersible Luminaires or Submersible Pumps (*power cord must be shortened to a 3-foot maximum length - see Installation Instructions*).

All Vista transformers are **MADE IN THE U.S.A.**



### DIMENSIONS:

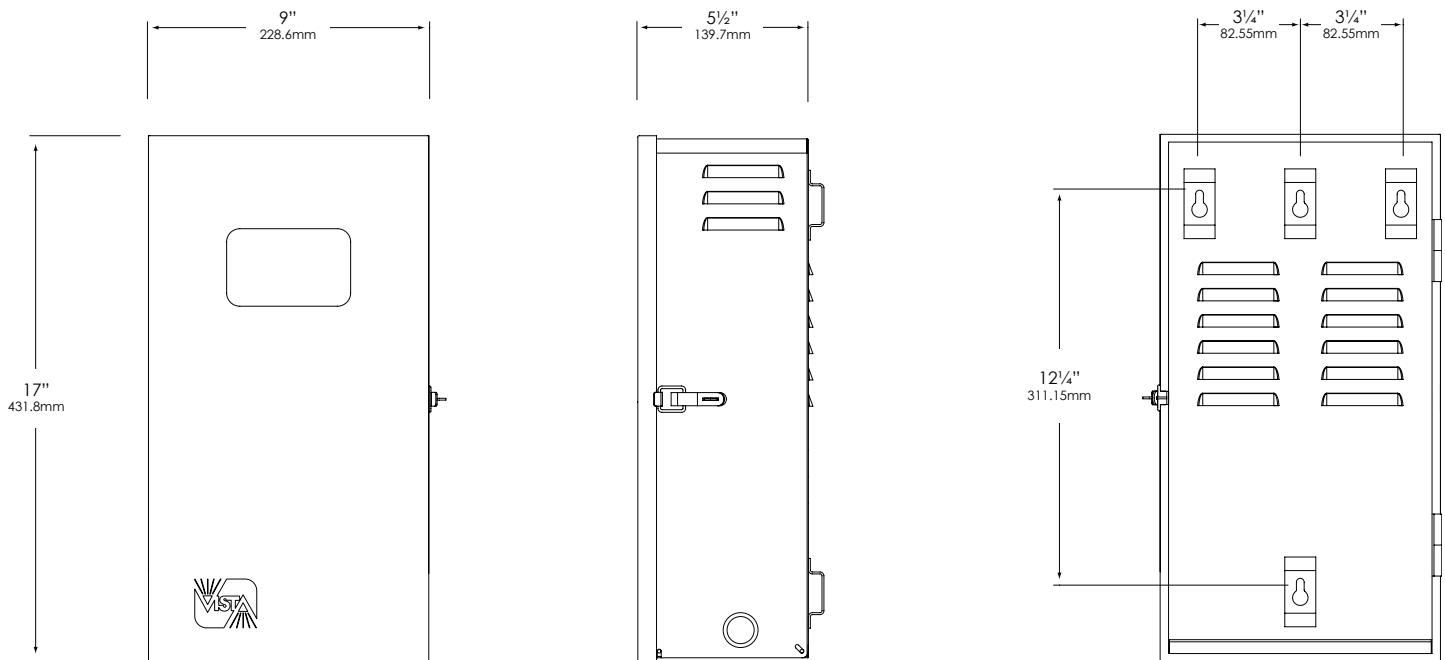

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.

## SPECIFICATION SHEET

# MULTI-TAP SERIES - *Stainless Steel Multi-Tap Transformer*

## TRANSFORMER ORDERING INFORMATION

**TO ORDER Transformer:** Select appropriate choice from each column as in the following example

**EXAMPLE: MT-600-DT-C**

TRANSFORMER SERIES	TRANSFORMER MODEL	ACCESSORY OPTIONS	FINISH
<b>MT-</b> Multi-Tap	<b>300-</b> 300 VA <b>600-</b> 600 VA (300 W x 2) <b>900-</b> 900 VA (300 W x 3) <b>1200-</b> 1200 VA (300 W x 4)	<b>T-</b> Removable multi-setting mechanical 24-hour timer <b>DT-</b> Removable multi-setting digital 7-day timer <b>RP-</b> Remote wired photocell with electronic timer  (Accessories not required for operation of transformer)	<b>C-</b> <i>Smudge-free</i> clear powder-coat <b>B-</b> Black <b>G-</b> Verde <b>BR-</b> Architectural Brick <b>Z-</b> Architectural Bronze <b>GT-</b> Granite <b>P-</b> Pewter <b>TC-</b> Terracotta <b>R-</b> Rust <b>HG-</b> Hunter Green <b>M-</b> Mocha <b>WB-</b> Weathered Bronze <b>WI-</b> Weathered Iron <b>W-</b> White

**Note:** When a finish is not specified, **MT** transformers will be shipped with a clear, polyester, powder-coated finish.

### FEATURES:

- Stainless steel, custom-designed, weather-tight casing seals components from moisture and debris. Vista's *Smudge-Free* clear powder-coat ensures a like-brand-new look for years to come.
- Take-apart stainless steel hinges for easy door removal allowing greater access during installation.
- Water-resistant weather-stripping around door seal.
- Easy to read instructions mounted inside door.
- Magnetic overload circuit breakers for reliable automatic circuit protection under all conditions. A rocker switch may also be used for manual on/off switching.
- Over-sized wiring compartment makes cable installation easy.
- ½"-¾" knockouts on each side of enclosure for conduit and accessory mounting as well as a removable, swing-down enclosure bottom with Adjustable Cable Raceway Feeder and multiple ½"-¾" and 2" knockouts.
- Extra-large terminal strip for multiple low voltage cable connections.
- Separate accessory terminal strip for easy installation of optional photo-cell, motion sensor, or other external switching devices.
- 6-foot, heavy-gauge, grounded, water-resistant power cord with integrally molded plug.
- 120-volt Accessory receptacle for use with optional, removable multi-setting mechanical 24-hour timer or electronic/digital 7-day timer (with battery back-up).
- Lockable, stainless steel latch can be secured to prevent tampering.
- Discrete louvered vents in the rear and sides of the cabinet maintain a cool operating temperature.
- 120-volt terminal strip for easy hard-wiring.
- Optional photocell is available for use with timers or stand-alone.
- Electronic timer and remote photocell combination standard in RP models.
- UL Listed to U.S. and Canadian safety standards for landscape lighting transformers (UL 1838). Pool & Spa Ready - Suitable for use with Submersible Luminaires or Submersible Pumps.
- Mounting template included.
- Also available in 240V, 50 or 60 cycle- Special order only.

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.